




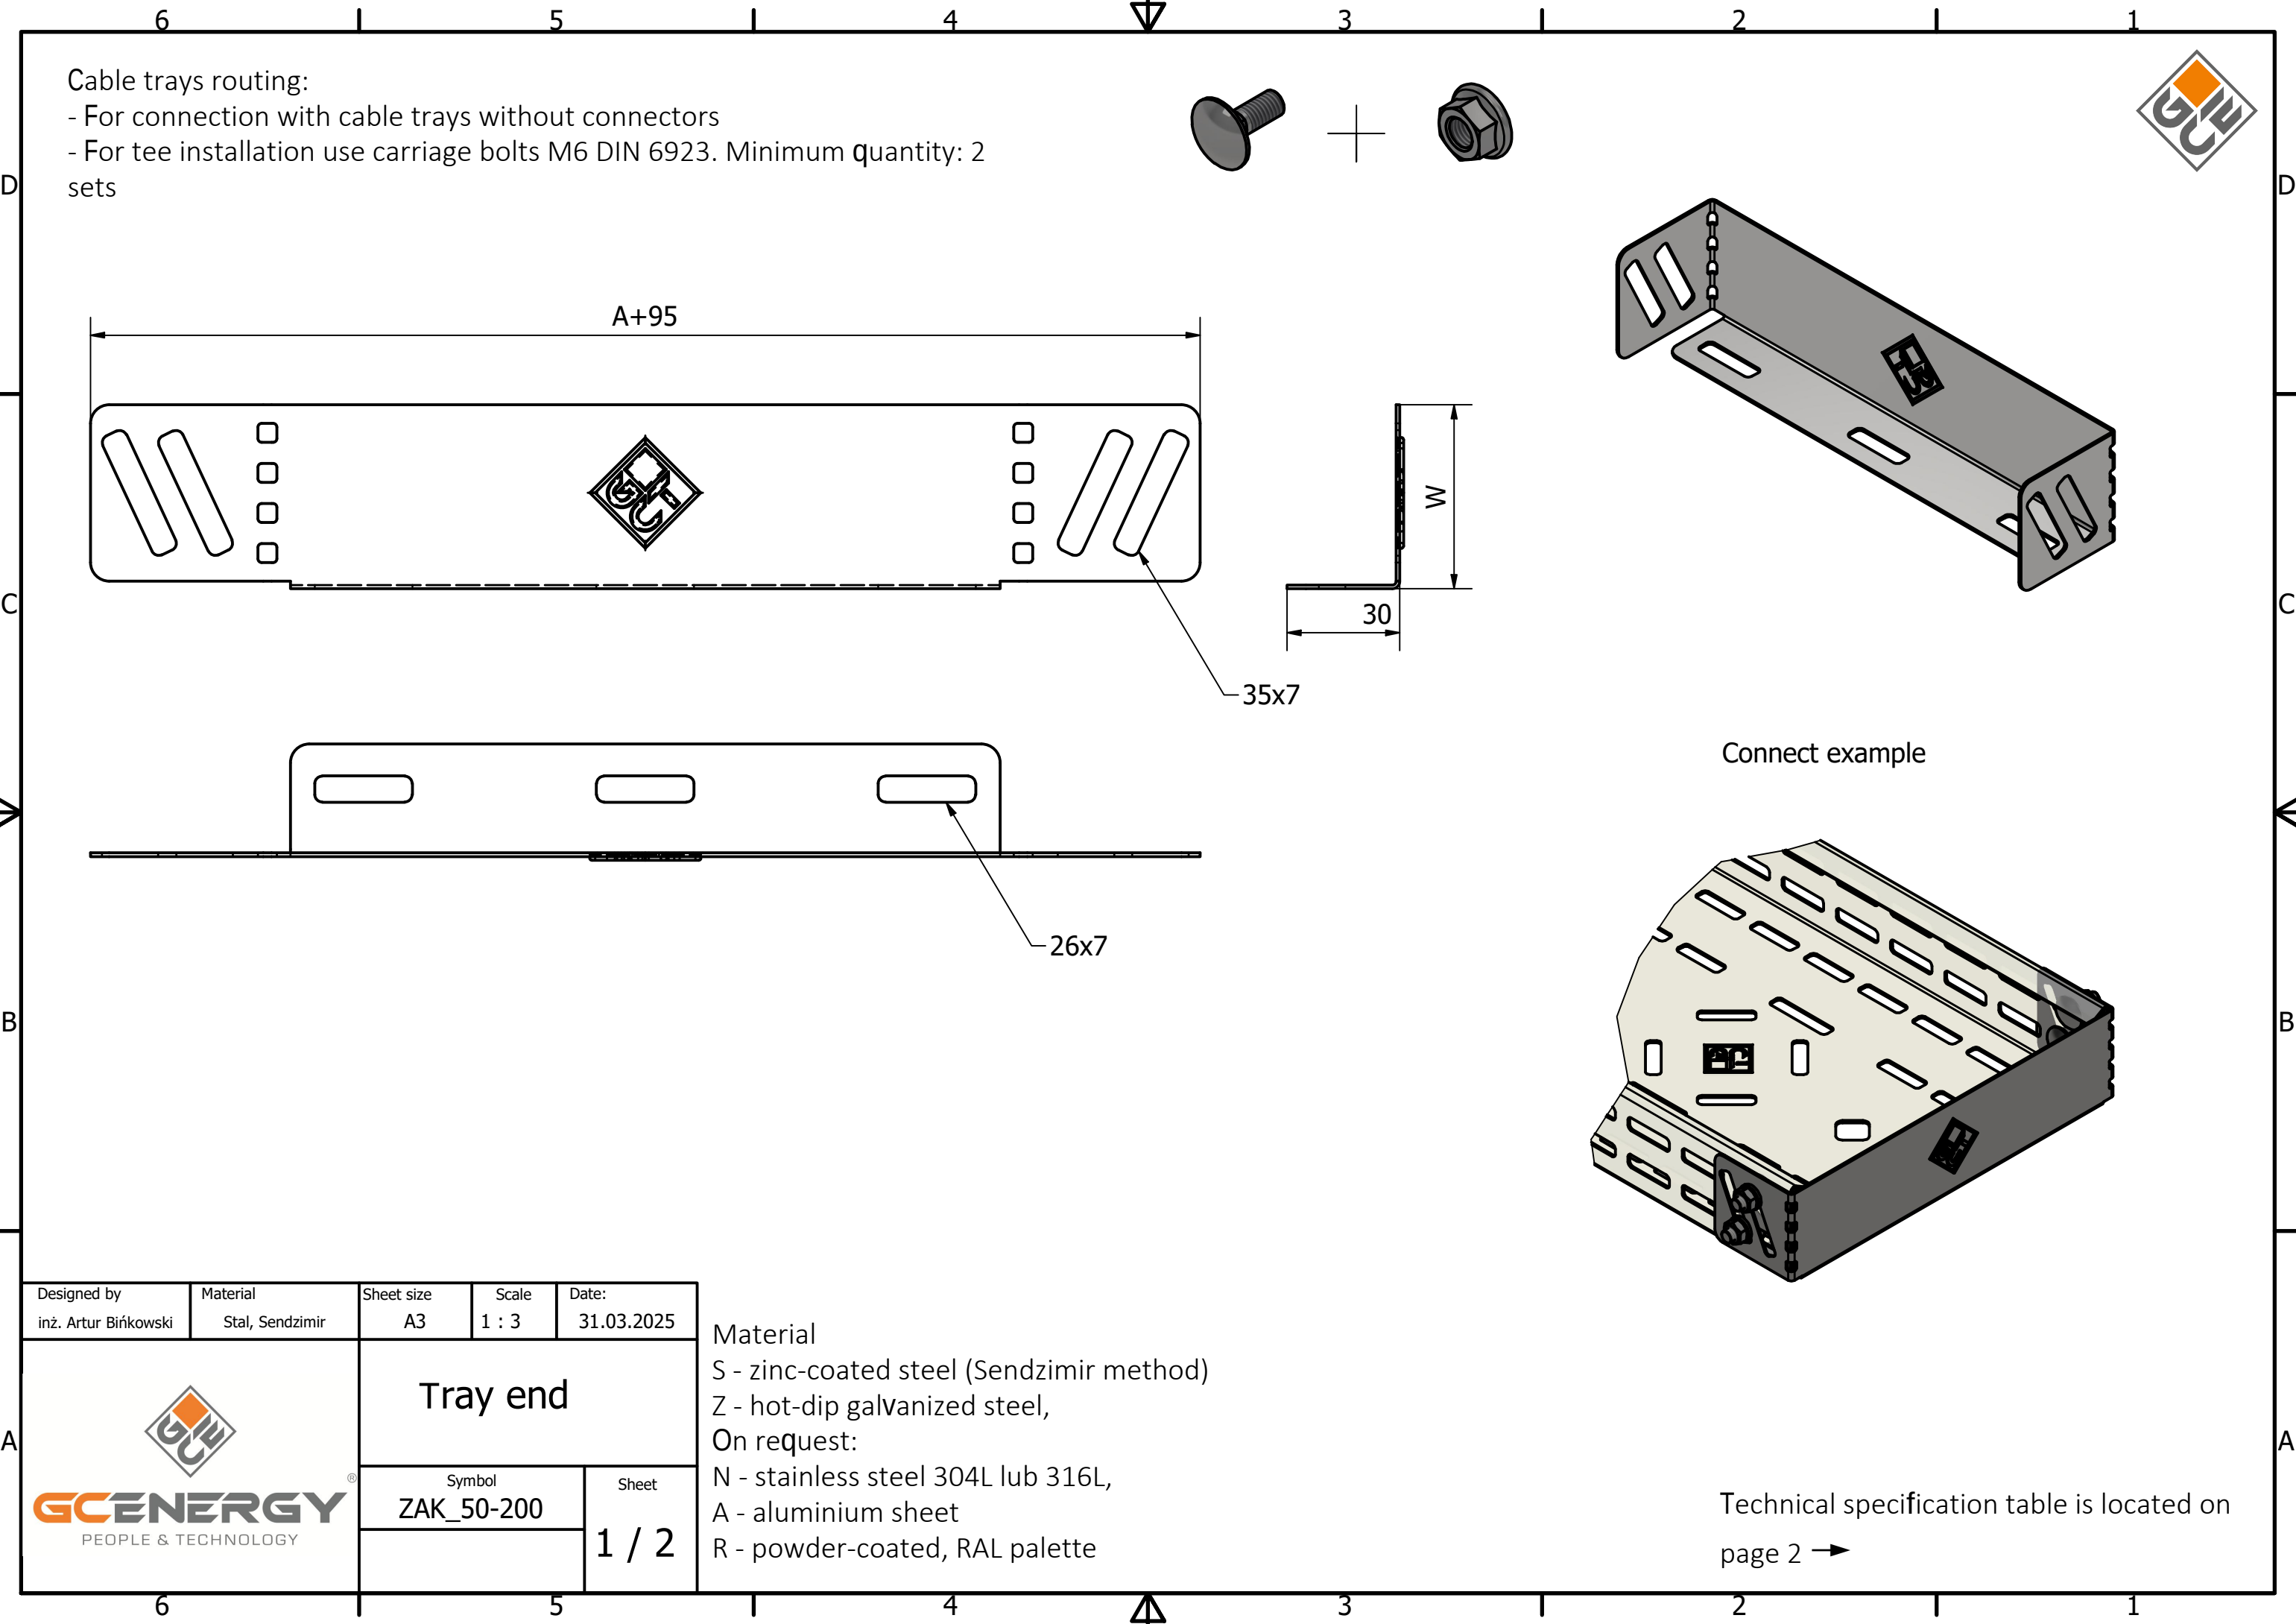

Cable trays routing:  
- For connection with cable trays without connectors  
- For tee installation use carriage bolts M6 DIN 6923. Minimum quantity: 2 sets

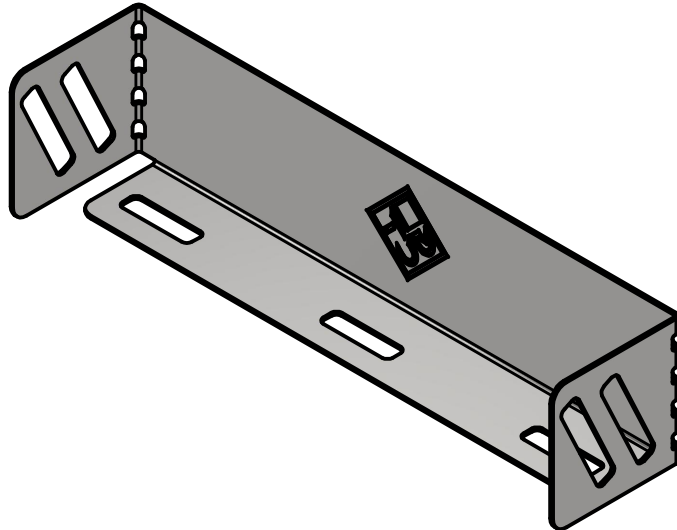

Connect example

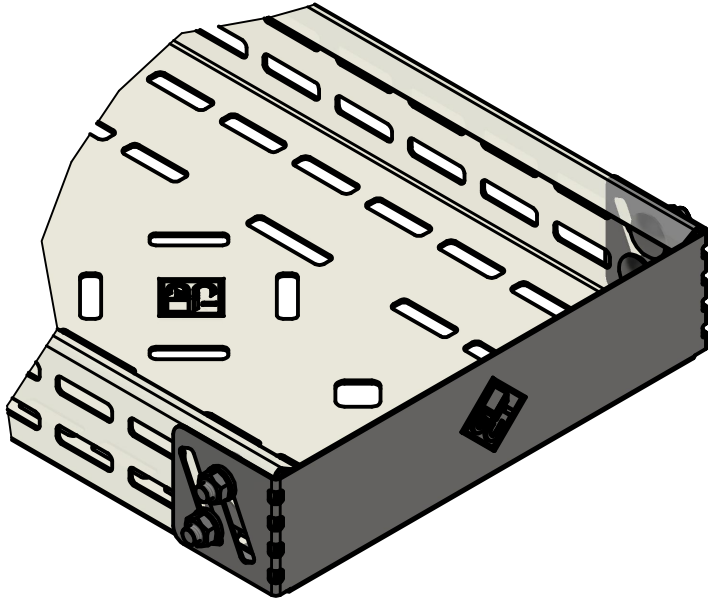

|                                                                                                                              |                             |                      |                |                     |
|------------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------------------|----------------|---------------------|
| Designed by<br>inż. Artur Bińkowski                                                                                          | Material<br>Stal, Sendzimir | Sheet size<br>A3     | Scale<br>1 : 3 | Date:<br>31.03.2025 |
| <br><b>GCENERGY</b><br>PEOPLE & TECHNOLOGY |                             | Tray end             |                |                     |
|                                                                                                                              |                             | Symbol<br>ZAK_50-200 | Sheet<br>1 / 2 |                     |
|                                                                                                                              |                             |                      |                |                     |

Material  
S - zinc-coated steel (Sendzimir method)  
Z - hot-dip galvanized steel,  
On request:  
N - stainless steel 304L lub 316L,  
A - aluminium sheet  
R - powder-coated, RAL palette

Technical specification table is located on  
page 2 →

