

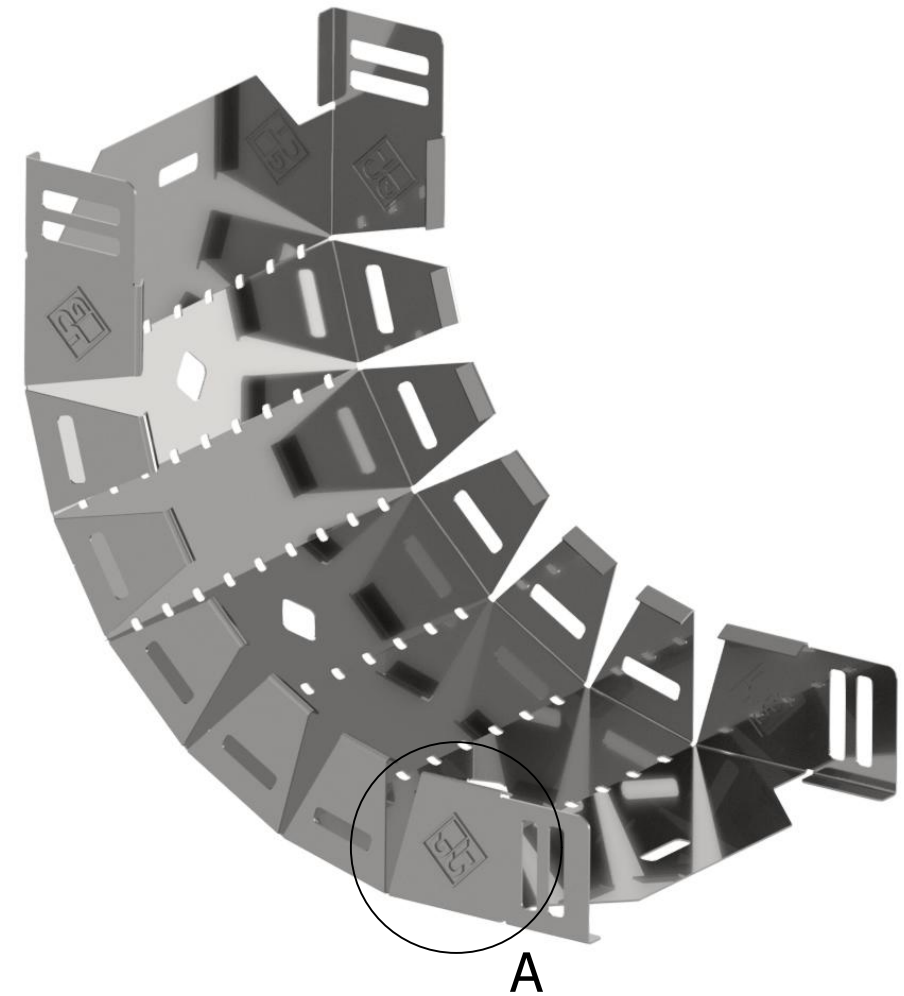
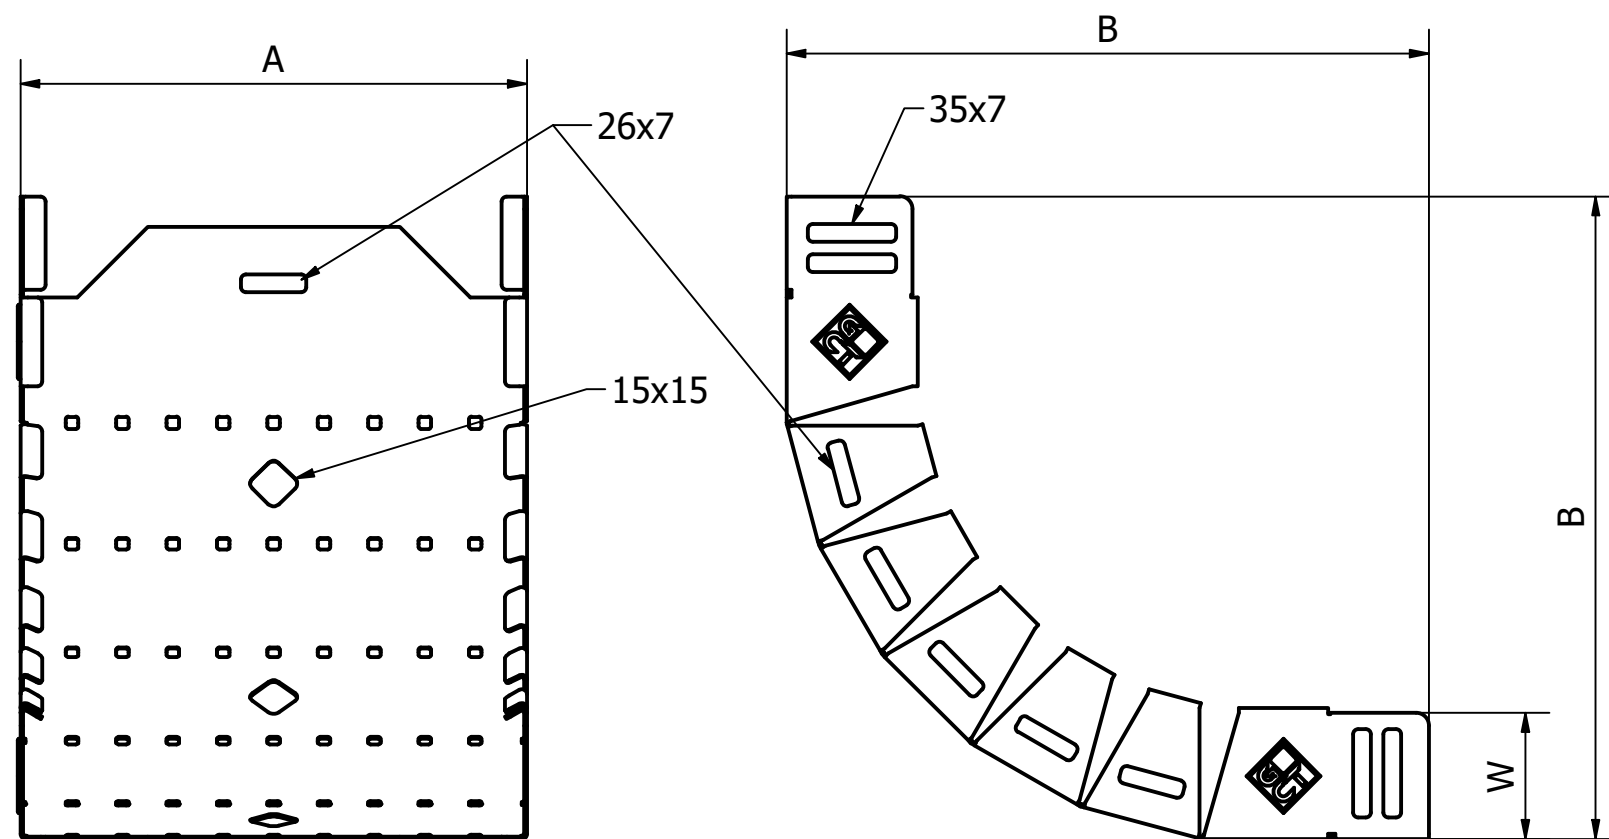


Cable trays routing:  
-For connecting to cable trays without connectors  
- For mounting the internal bend use carriage bolts M6 DIN 603 with  
flange nuts M6 DIN 6923. Minimum quantity: 8 sets

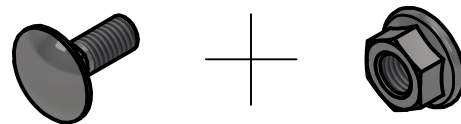

A ( 2 : 3 )

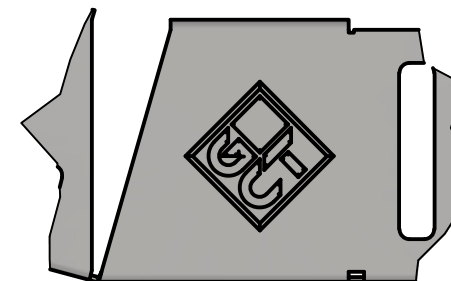


|                                                                                                                                |                             |                     |                |                     |
|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------|---------------------|----------------|---------------------|
| Designed by<br>inż. Artur Bińkowski                                                                                            | Material<br>Stal, Sendzimir | Sheet size<br>A3    | Scale<br>1 : 3 | Date:<br>31.03.2025 |
| <br><b>GCEENERGY</b><br>PEOPLE & TECHNOLOGY |                             | Internal bend       |                |                     |
|                                                                                                                                |                             | Symbol<br>LW_50-200 | Sheet<br>1 / 2 |                     |
|                                                                                                                                |                             |                     |                |                     |

Material  
S - zinc-coated steel (Sendzimir method)  
Z - hot-dip galvanized steel,  
On request:  
N - stainless steel 304L lub 316L,  
A - aluminium sheet  
R - powder-coated, RAL palette.

Technical specification table is located on  
page 2 →

Cable trays routing:  
-For connecting to cable trays without connectors  
- For mounting the internal bend use carriage bolts M6 DIN 603 with flange nuts M6 DIN 6923. Minimum quantity: 8 sets

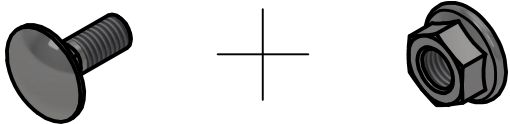

|  |  |  |  |  | Internal bend |                  |                  |                  |                     |
|--|--|--|--|--|---------------|------------------|------------------|------------------|---------------------|
|  |  |  |  |  | INDEX         | Wym. A<br>[ mm ] | Wym. B<br>[ mm ] | Wym. W<br>[ mm ] | Thickness<br>[ mm ] |
|  |  |  |  |  | LW/60 - 50    | 50               | 300              | 60               | 0,7                 |
|  |  |  |  |  | LW/60 - 100   | 100              | 300              | 60               | 0,7                 |
|  |  |  |  |  | LW/60 - 150   | 150              | 300              | 60               | 0,7                 |
|  |  |  |  |  | LW/60 - 200   | 200              | 300              | 60               | 0,7                 |
|  |  |  |  |  | LW/60 - 300   | 300              | 300              | 60               | 0,7                 |
|  |  |  |  |  | LW/60 - 400   | 400              | 300              | 60               | 1,0                 |
|  |  |  |  |  | LW/60 - 500   | 500              | 300              | 60               | 1,0                 |
|  |  |  |  |  | LW/60 - 600   | 600              | 300              | 60               | 1,0                 |
|  |  |  |  |  | LW/80 - 100   | 100              | 385              | 80               | 0,7                 |
|  |  |  |  |  | LW/80 - 150   | 150              | 385              | 80               | 0,7                 |
|  |  |  |  |  | LW/80 - 200   | 200              | 385              | 80               | 0,7                 |
|  |  |  |  |  | LW/80 - 300   | 300              | 385              | 80               | 0,7                 |
|  |  |  |  |  | LW/80 - 400   | 400              | 385              | 80               | 1,0                 |
|  |  |  |  |  | LW/80 - 500   | 500              | 385              | 80               | 1,0                 |
|  |  |  |  |  | LW/80 - 600   | 600              | 385              | 80               | 1,0                 |
|  |  |  |  |  | LW/100 - 100  | 100              | 470              | 100              | 0,7                 |
|  |  |  |  |  | LW/100 - 150  | 150              | 470              | 100              | 0,7                 |
|  |  |  |  |  | LW/100 - 200  | 200              | 470              | 100              | 0,7                 |
|  |  |  |  |  | LW/100 - 300  | 300              | 470              | 100              | 0,7                 |
|  |  |  |  |  | LW/100 - 400  | 400              | 470              | 100              | 1,0                 |
|  |  |  |  |  | LW/100 - 500  | 500              | 470              | 100              | 1,0                 |
|  |  |  |  |  | LW/100 - 600  | 600              | 470              | 100              | 1,0                 |
|  |  |  |  |  | LW/110 - 100  | 100              | 510              | 110              | 0,7                 |
|  |  |  |  |  | LW/110 - 150  | 150              | 510              | 110              | 0,7                 |
|  |  |  |  |  | LW/110 - 200  | 200              | 510              | 110              | 0,7                 |
|  |  |  |  |  | LW/110 - 300  | 300              | 510              | 110              | 0,7                 |
|  |  |  |  |  | LW/110 - 400  | 400              | 510              | 110              | 1,0                 |
|  |  |  |  |  | LW/110 - 500  | 500              | 510              | 110              | 1,0                 |
|  |  |  |  |  | LW/110 - 600  | 600              | 510              | 110              | 1,0                 |

Material  
S - zinc-coated steel (Sendzimir method)  
Z - hot-dip galvanized steel,  
On request:  
N - stainless steel 304L lub 316L,  
A - aluminium sheet  
R - powder-coated, RAL palette.