
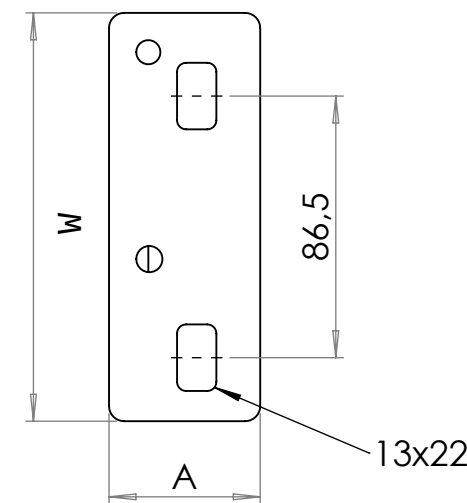
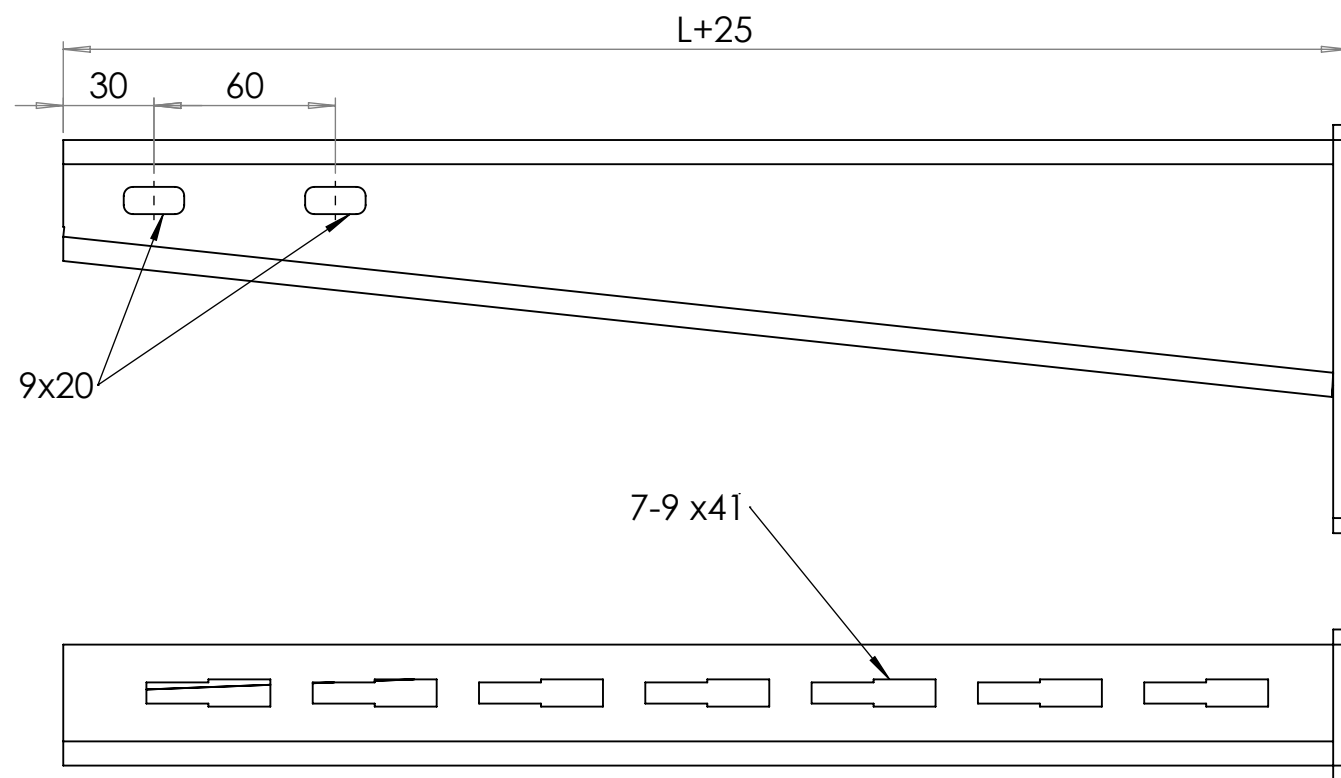
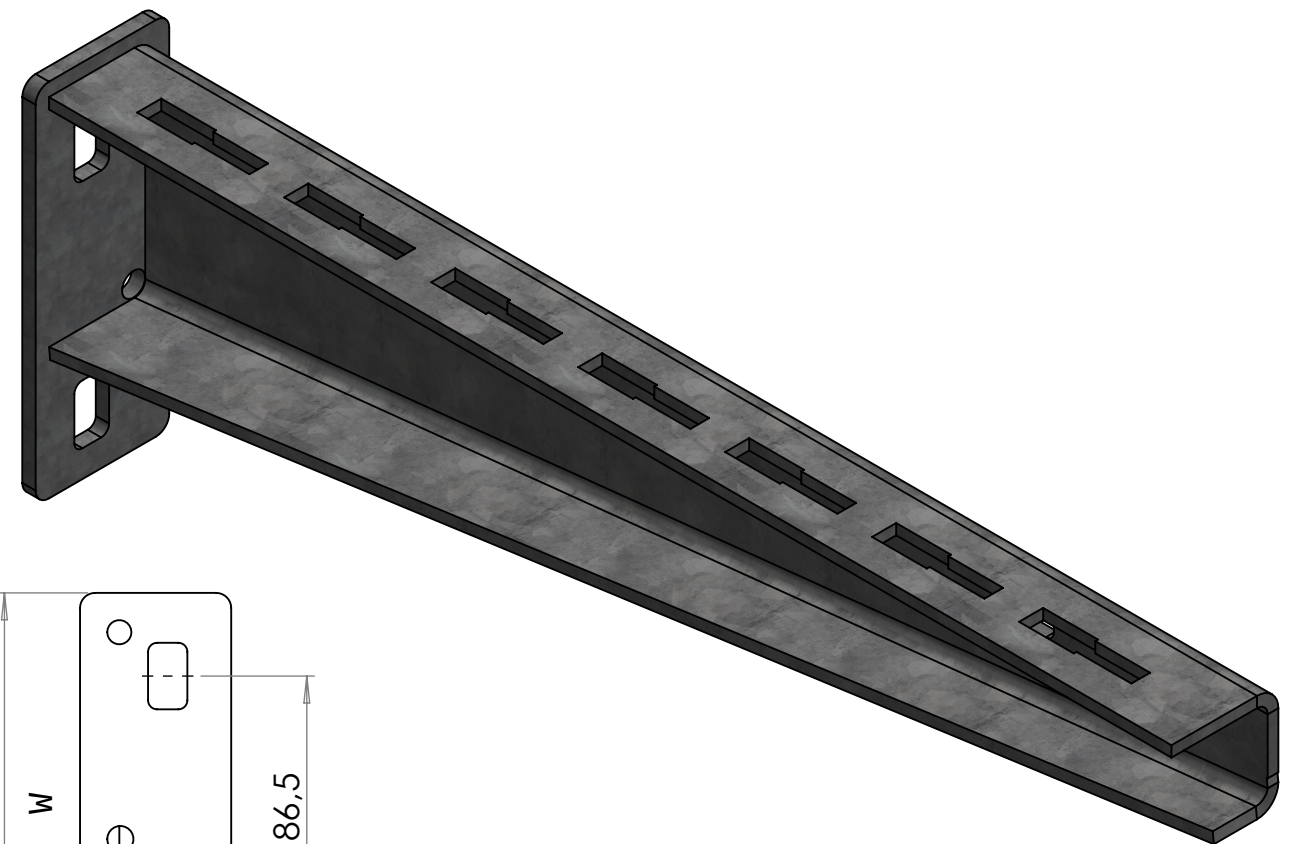


Przeznaczenie:

- Do mocowania tras kablowych do ścian oraz konstrukcji wsporczych,
- Do montażu zalecamy użyć kotew rozporowych RKDB M12 w ilości 2szt.



Wspornik Mocny Ścienny Ciężki				
INDEKS	Wymiar A [mm]	Wymiar W [mm]	Wymiar L [mm]	Waga [kg]
WMSC/100	40	125	100	0,46
WMSC/150	40	125	150	0,61
WMSC/200	40	125	200	0,76
WMSC/250	40	125	250	0,91
WMSC/300	40	125	300	1,06
WMSC/350	40	125	350	1,21
WMSC/400	40	125	400	1,36
WMSC/450	40	125	450	1,51
WMSC/500	40	125	500	1,66
WMSC/550	40	125	550	1,81
WMSC/600	40	125	600	1,96
WMSC/650	40	125	650	2,11
WMSC/700	40	125	700	2,26
WMSC/750	40	125	750	2,41
WMSC/800	40	125	800	2,56
WMSC/900	40	125	900	2,71
WMSC/1000	40	125	1000	2,86

Zaprojektowany przez inż. Artur Bińkowski	Material	Format arkusza A3	Skala 1 : 2	Data utworzenia 1.05.2025
		Wspornik mocny ścienny ciężki		
		Symbol WMSC	Arkusz 1 / 1	
		Numer katalogowy -		

Materiał
F - stal cynkowana metodą zanurzeniową,
Na zamówienie:
E - stal nierdzewna 304 lub 316L,
R - lakierowanie proszkowo z palety RAL.