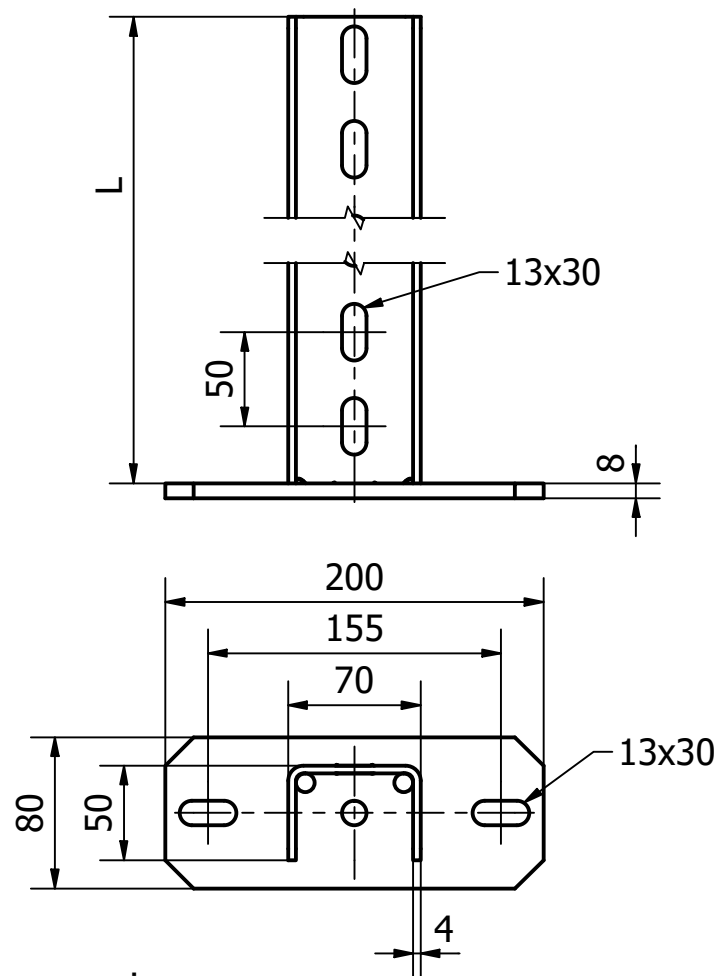


Materiał:
 F - stal cynkowana metodą zanurzeniową
 Na zamówienie:
 E - stal nierdzewna 304 lub 316L
 R - lakierowane proszkowo z palety RAL

Symbol	Wymiar L [mm]	Nr katalogowy	Masa [kg]
KW200F	200	GTF-05625	1.76
KW300F	300	GTF-05626	2.19
KW400F	400	GTF-05627	2.62
KW500F	500	GTF-05628	3.05
KW600F	600	GTF-05629	3.48
KW700F	700	GTF-05630	3.91
KW800F	800	GTF-05631	4.34
KW900F	900	GTF-05755	4.77
KW1000F	1000	GTF-05756	5.2
KW1100F	1100	GTF-05757	5.63
KW1200F	1200	GTF-05758	6.06
KW1500F	1500	GTF-05759	7.35
KW1700F	1700	GTF-05760	8.21
KW2000F	2000	GTF-05761	9.5
KW3000F	3000	GTF-05762	13.8

Autor:	Materiał:	Format ark.:	Skala:	Data:
Piotr Duda	Stal	A4	1 : 4	09.08.2026
 Konstrukcja wporcza  Powered by GCENERGY PEOPLE & TECHNOLOGY		Symbol:		
		KW		
		Arkusz:		
		1/1		