
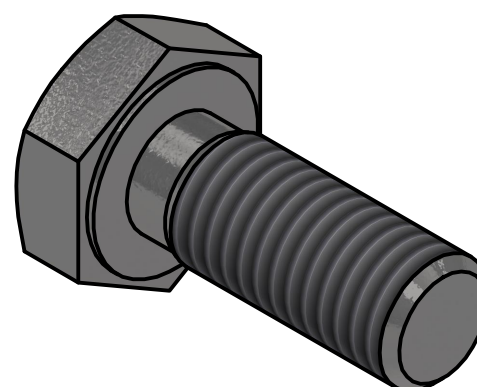


- łączenie elementów tras kablowych,
- dokładne wymiary według DIN 933,
- klasa twardości 5.8

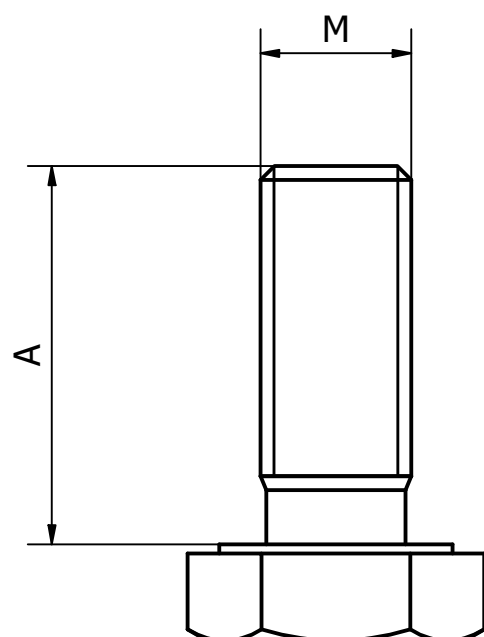

Śruba z łbem sześciokątnym		
INDEKS	Wymiar A [mm]	Wymiar M [mm]
SR M6x10	10	M6
SR M6x12	12	M6
SR M6x14	14	M6
SR M6x16	16	M6
SR M8x20	20	M8
SR M8x25	25	M8
SR M8x30	30	M8
SR M8x40	40	M8
SR M10x20	20	M10
SR M10x30	30	M10
SR M10x40	40	M10
SR M10x50	50	M10
SR M10x60	60	M10
SR M10x80	80	M10
SR M10x100	100	M10
SR M12x30	30	M12
SR M12x40	40	M12
SR M12x50	50	M12
SR M12x60	60	M12
SR M12x80	80	M12
SR M12x100	100	M12
SR M12x120	120	M12

Zaprojektowany przez inż. Artur Bińkowski	Material Stal, galwanizowana	Format arkusza A3	Skala 2 : 1	Data utworzenia 9.06.2025
		Śruba z łbem sześciokątnym		
		Symbol SR	Arkusz 1 / 1	
		Numer katalogowy -		

Materiał
S - stal cynkowana galwanicznie,
Na zamówienie:
E - stal nierdzewna A2 lub A4