

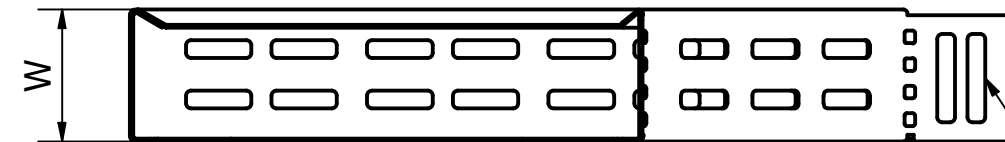
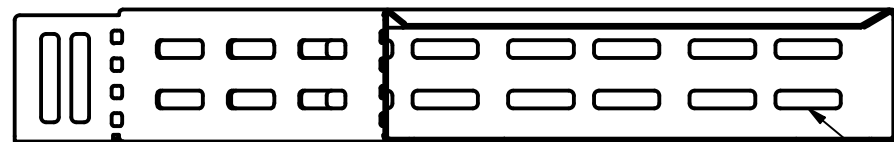


Cable trays routing:
- For connection with cable trays without connectors
- For tee installation use carriage bolts M6 DIN 6923. Minimum
quantity: 4 sets

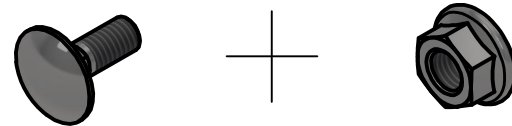


35x7

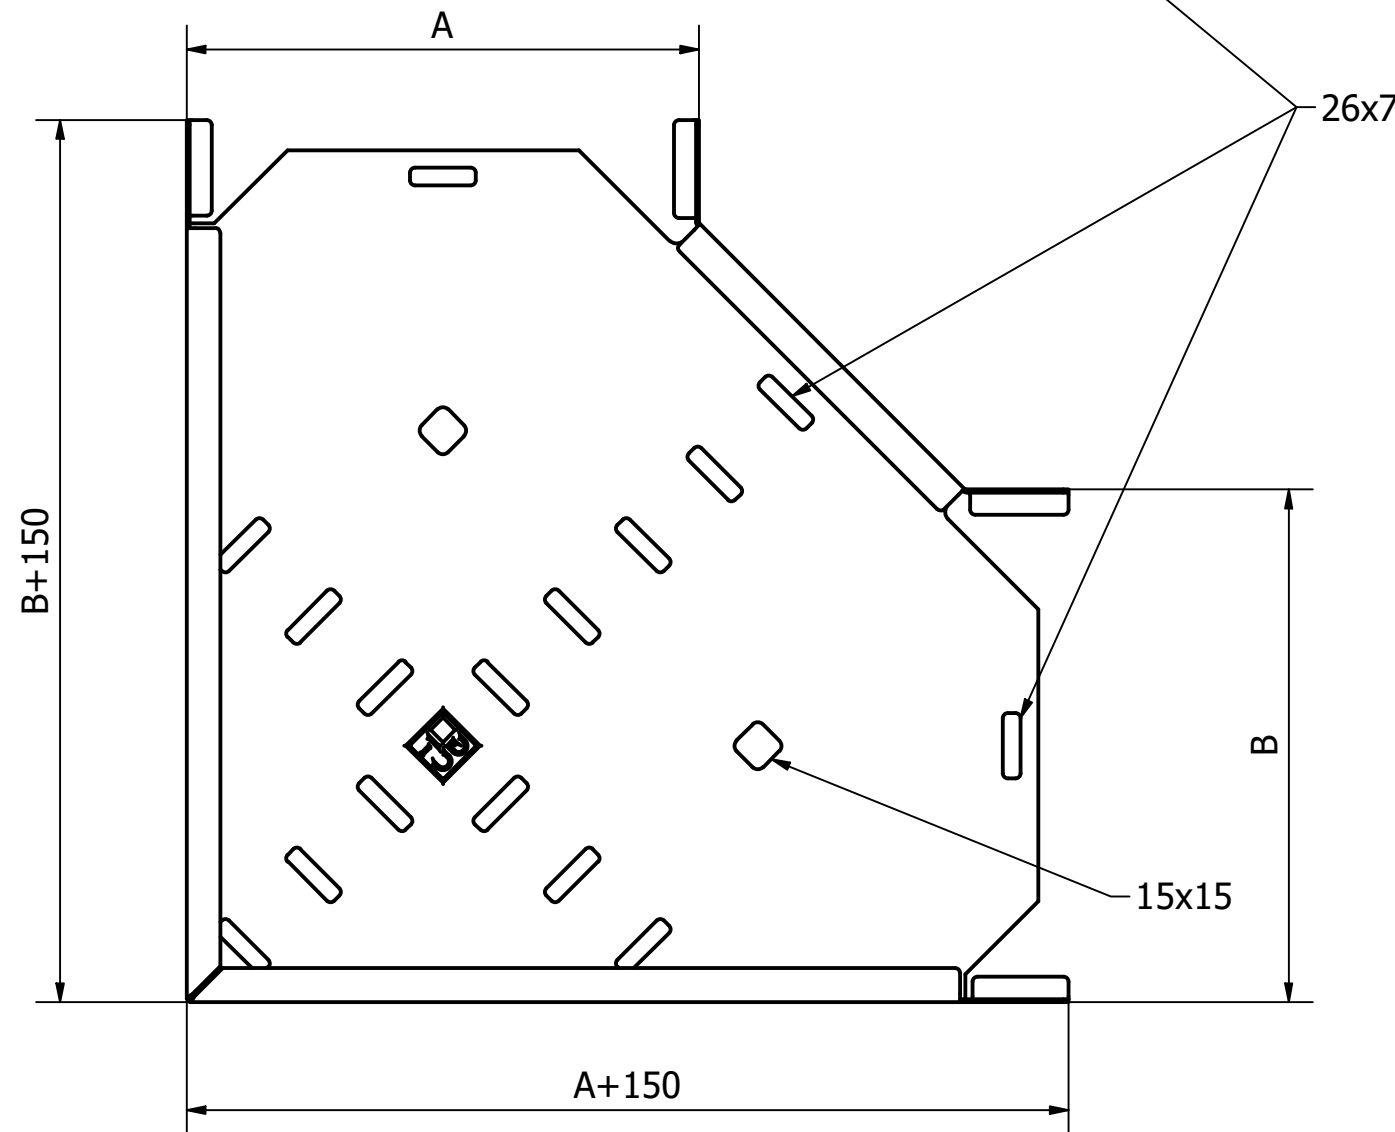

26x7

15x15

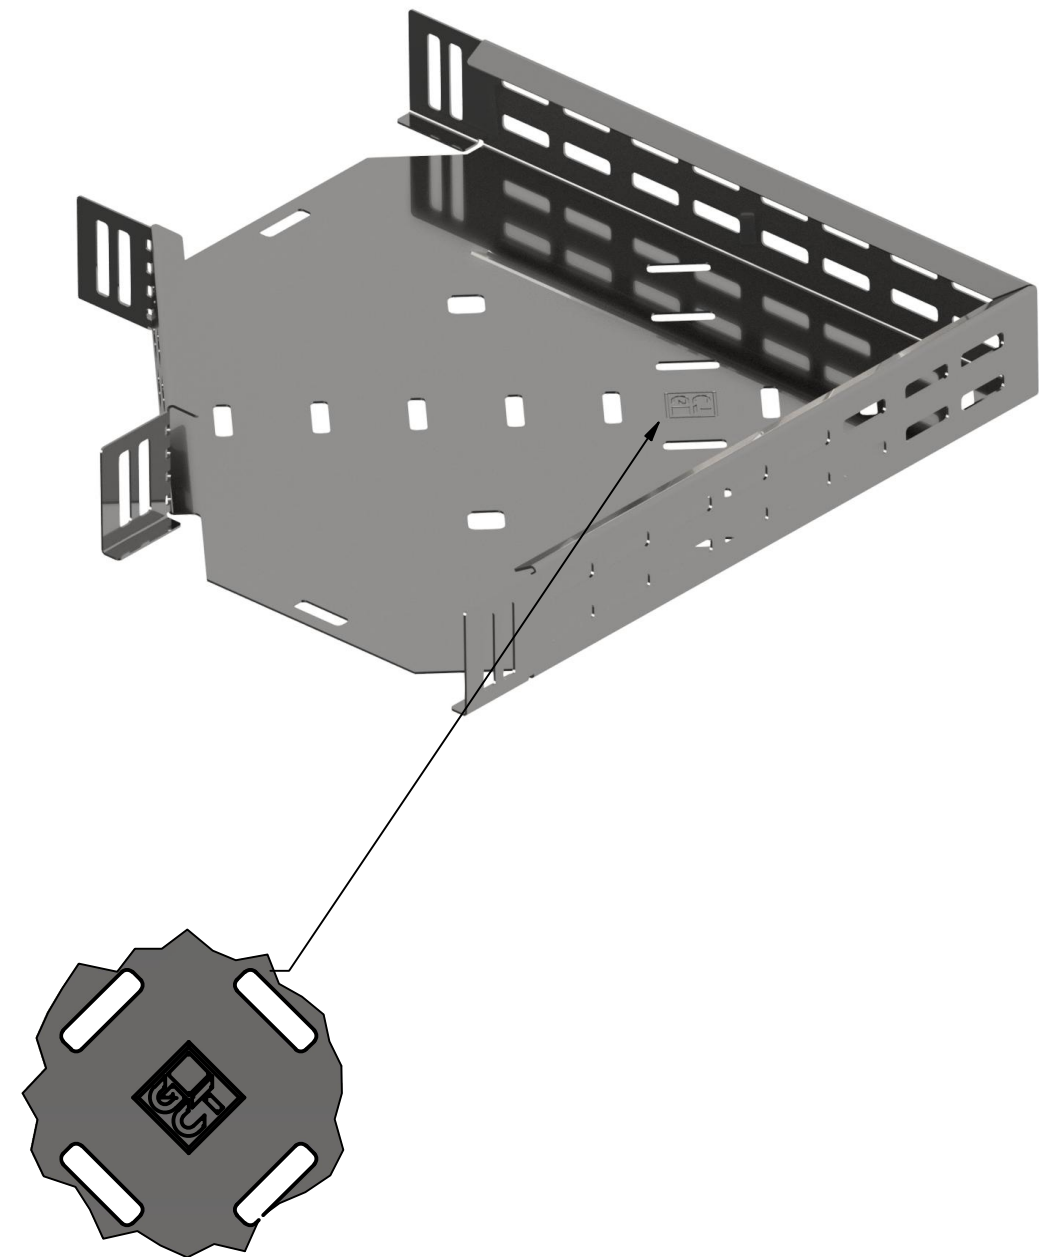


Designed by	Material	Sheet size	Scale	Date:
inż. Artur Bińkowski	Stal, Sendzimir	A3	1 : 3	31.03.2025

	Tray bend	
	Symbol	Sheet
	ZK_90_50-200	1 / 2

Material
S - zinc-coated steel (Sendzimir method)
Z - hot-dip galvanized steel,
On request:
N - stainless steel 304L lub 316L,
A - aluminium sheet
R - powder-coated, RAL palette.

Technical specification table is located on
page 2 →

Cable trays routing:
- For connection with cable trays without connectors
- For tee installation use carriage bolts M6 DIN 6923. Minimum
quantity: 4 sets

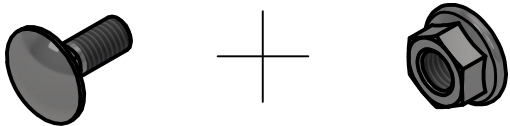

Cable tray cross connector			
INDEX	Dim. A=B [MM]	Dim. W [mm]	Thickness [mm]
ZK90/60 - 50	50	60	0,7
ZK90/60 - 100	100	60	0,7
ZK90/60 - 150	150	60	0,7
ZK90/60 - 200	200	60	0,7
ZK90/60 - 300	300	60	0,7
ZK90/60 - 400	400	60	1,0
ZK90/60 - 500	500	60	1,0
ZK90/60 - 600	600	60	1,0
ZK90/80 - 100	100	80	0,7
ZK90/80 - 150	150	80	0,7
ZK90/80 - 200	200	80	0,7
ZK90/80 - 300	300	80	0,7
ZK90/80 - 400	400	80	1,0
ZK90/80 - 500	500	80	1,0
ZK90/80 - 600	600	80	1,0
ZK90/100 - 100	100	100	0,7
ZK90/100 - 150	150	100	0,7
ZK90/100 - 200	200	100	0,7
ZK90/100 - 300	300	100	0,7
ZK90/100 - 400	400	100	1,0
ZK90/100 - 500	500	100	1,0
ZK90/100 - 600	600	100	1,0
ZK90/110 - 100	100	110	0,7
ZK90/110 - 150	150	110	0,7
ZK90/110 - 200	200	110	0,7
ZK90/110 - 300	300	110	0,7
ZK90/110 - 400	400	110	1,0
ZK90/110 - 500	500	110	1,0
ZK90/110 - 600	600	110	1,0

Cable tray cross connector			
INDEX	Dim. A=B[mm]	Dim. W [mm]	Thickness [mm]
ZK90/30 - 50	50	30	0,7
ZK90/30 - 100	100	30	0,7
ZK90/30 - 150	150	30	0,7
ZK90/30 - 200	200	30	0,7
ZK90/30 - 300	300	30	0,7
ZK90/42 - 50	50	42	0,7
ZK90/42 - 100	100	42	0,7
ZK90/42 - 150	150	42	0,7
ZK90/42 - 200	200	42	0,7
ZK90/42 - 300	300	42	0,7
ZK90/42 - 400	400	42	1,0
ZK90/42 - 500	500	42	1,0
ZK90/42 - 600	600	42	1,0
ZK90/50 - 50	50	50	0,7
ZK90/50 - 100	100	50	0,7
ZK90/50 - 150	150	50	0,7
ZK90/50 - 200	200	50	0,7
ZK90/50 - 300	300	50	0,7
ZK90/50 - 400	400	50	1,0
ZK90/50 - 500	500	50	1,0
ZK90/50 - 600	600	50	1,0

Material
S - zinc-coated steel (Sendzimir method)
Z - hot-dip galvanized steel,
On request:
N - stainless steel 304L lub 316L,
A - aluminium sheet
R - powder-coated, RAL palette