

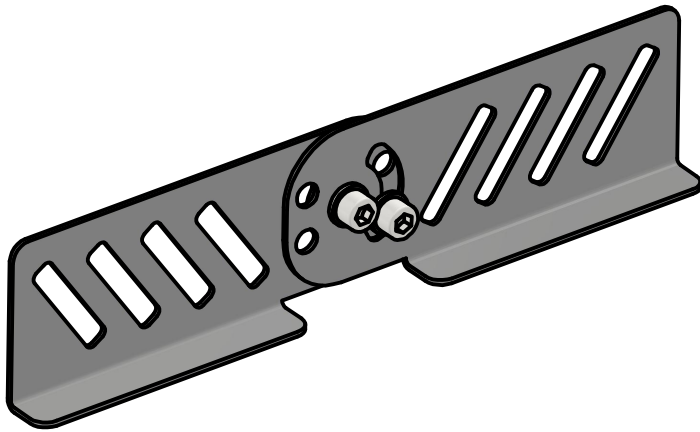
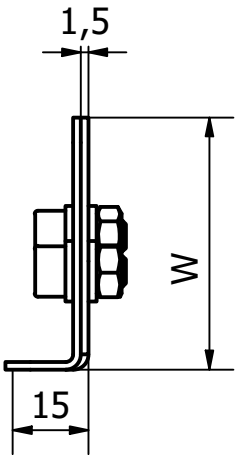
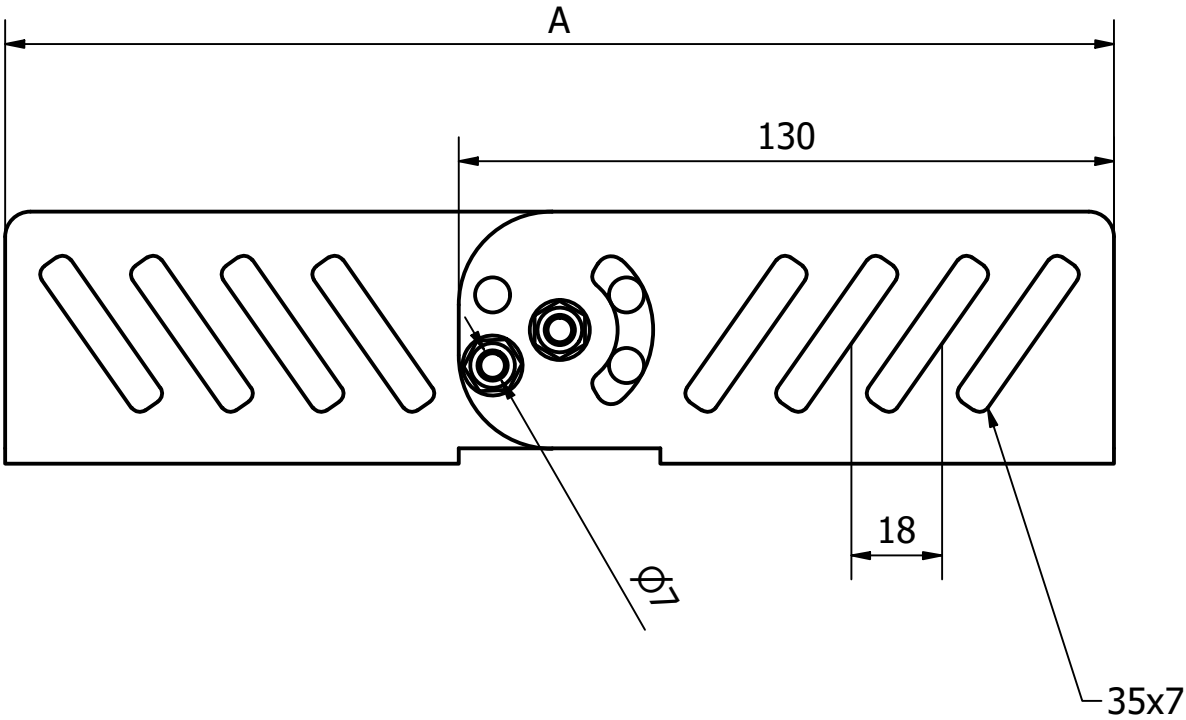


For the installation of a single connector use M6 carriage bolts DIN 603 with M6 flanged nuts DIN 6923. Minimum quantity: 6 sets

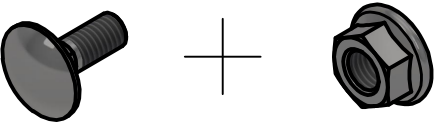

Connect example

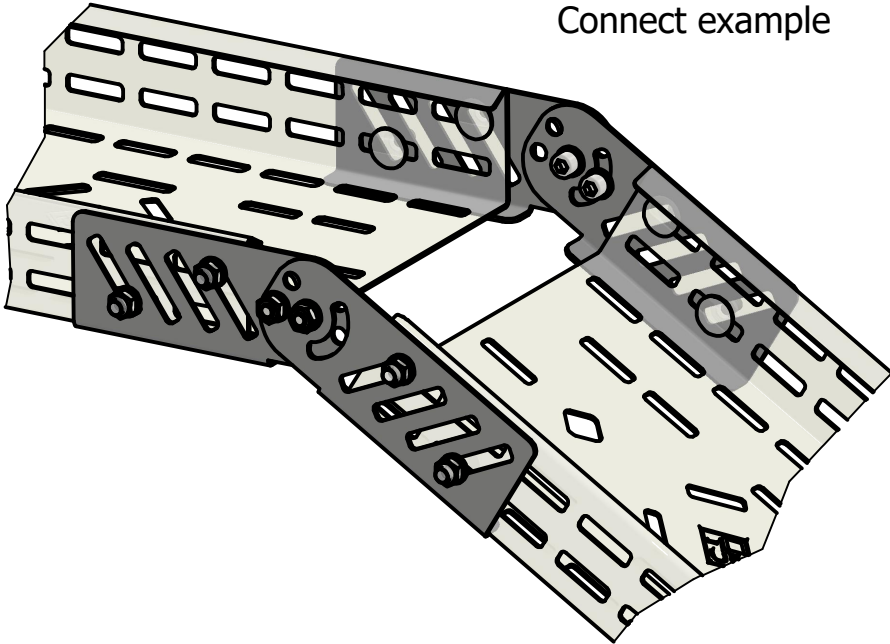

Designed by inż. Artur Bińkowski	Material Stal, Sendzimir	Sheet size A3	Scale 1 : 2	Date 29.01.2025
-------------------------------------	-----------------------------	------------------	----------------	--------------------



PEOPLE & TECHNOLOGY

Articulated connector
for cable tray

Symbol LKKO	Sheet 1 / 1
----------------	----------------

Material
S - zinc-coated steel (Sendzimir method)
Z - hot-dip galvanized steel,
On request:
N - stainless steel 304L lub 316L,
A - aluminium sheet
R - powder-coated, RAL palette

Angle tray connector				
INDEX	Dim. A [mm]	Dim. W [mm]	Weight [kg]	Thickness [mm]
LPKO-30	220	30	0,10	1,5
LPKO-42	220	42	0,13	1,5
LPKO-50	220	50	0,16	1,5
LPKO-60	220	60	0,19	1,5
LPKO-80	220	80	0,22	1,5
LPKO-100	220	100	0,29	1,5
LPKO-110	220	110	0,32	1,5