

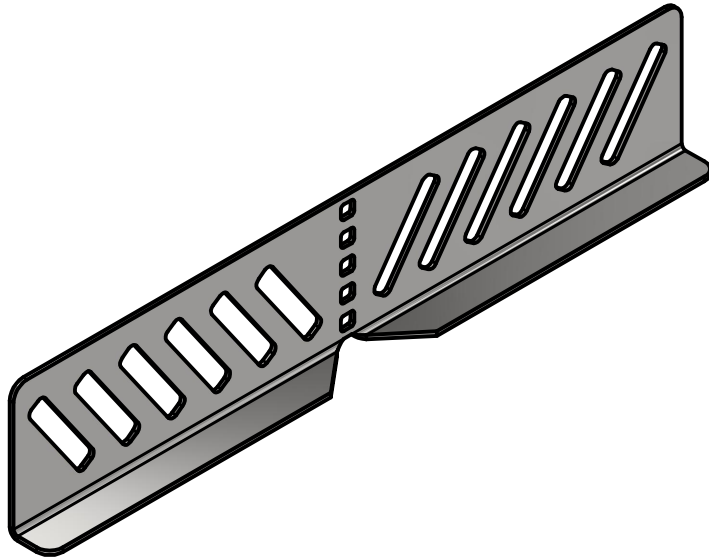

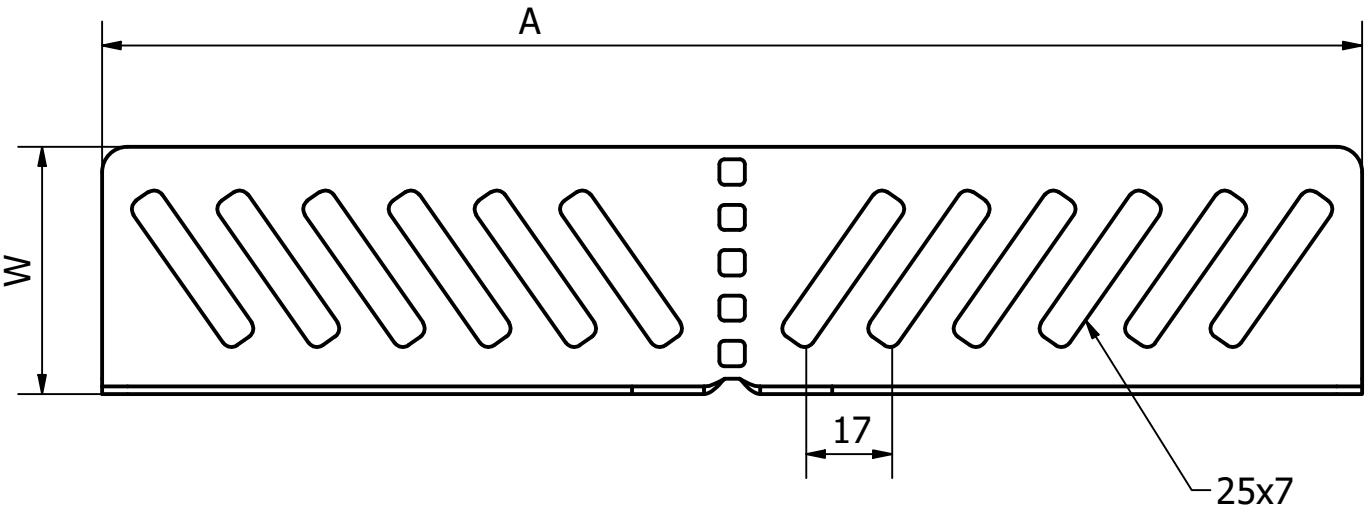


For the installation of a single connector use M6 carriage bolts DIN 603 with M6 flanged nuts DIN 6923. Minimum quantity: 6 sets

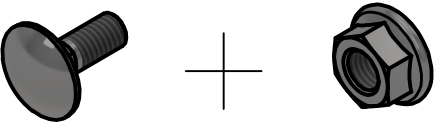

Connect Example

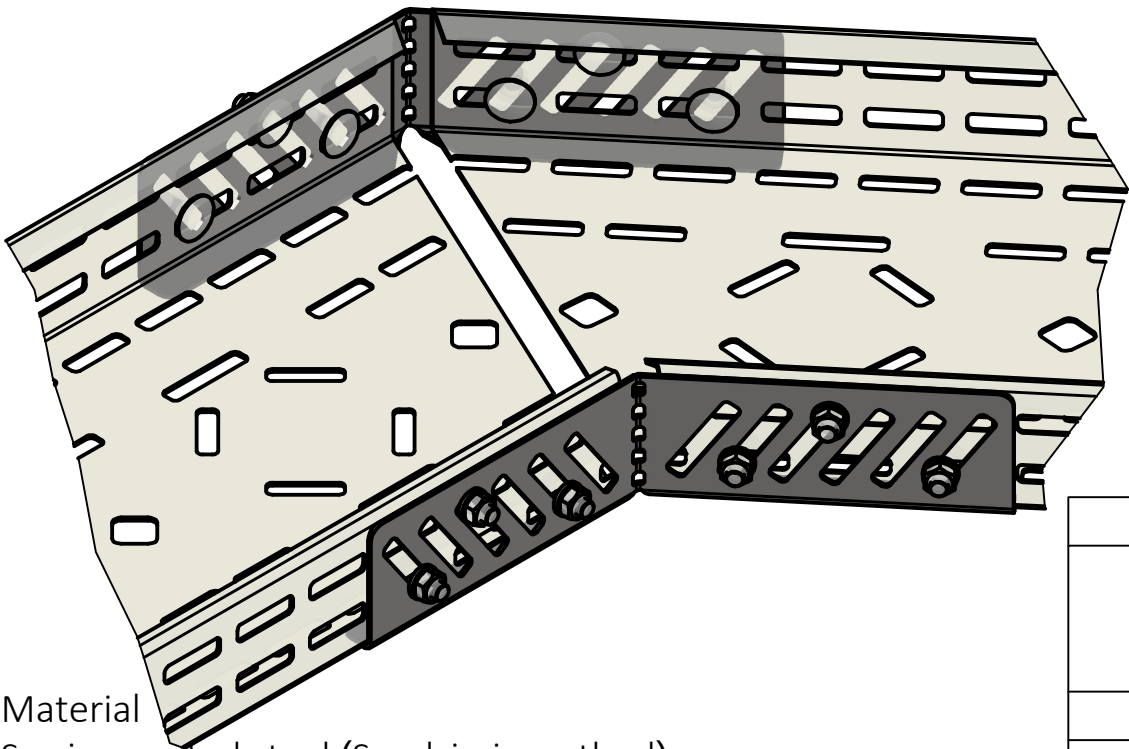

Designed by inż. Artur Bińkowski	Material Stal, Sendzimir	Sheet size A3	Scale 1 : 2	Date 29.01.2025
 GCE ENERGY PEOPLE & TECHNOLOGY		Angle tray connector		
		Symbol LKKO	Sheet 1 / 1	

Material
S - zinc-coated steel (Sendzimir method)
Z - hot-dip galvanized steel,
On request:
N - stainless steel 304L lub 316L,
A - aluminium sheet
R - powder-coated, RAL palette

Angle tray connector				
INDEX	Dim. A [mm]	Dim. W [mm]	Weight [kg]	Thickness [mm]
LKKO-30	250	30	0,08	1,5
LKKO-42	250	42	0,11	1,5
LKKO-50	250	50	0,14	1,5
LKKO-60	250	60	0,17	1,5
LKKO-80	250	80	0,20	1,5
LKKO-100	250	100	0,26	1,5
LKKO-110	250	110	0,29	1,5